



20 SEP 2004



(43) International Publication Date  
2 October 2003 (02.10.2003)

PCT

(10) International Publication Number  
**WO 03/081030 A1**

(51) International Patent Classification<sup>7</sup>: **F03B 13/26**,  
17/06

[GB/GB]; 2 Fitz James Avenue, Kensington, Olympia,  
London W14 0RP (GB).

(21) International Application Number: PCT/GB03/01173

(74) Agents: **MILLS, Julia** et al.; D Young & Co, 21 New  
Fetter Lane, London EC4A 1DA (GB).

(22) International Filing Date: 19 March 2003 (19.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0206623.1 20 March 2002 (20.03.2002) GB

(71) Applicant (for all designated States except US): **HY-  
DROVENTURI LIMITED** [GB/GB]; HEP Group, Room  
504, Blackett Laboratory, Imperial College, London SW7  
2BX (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **ROCHESTER, Ge-  
offrey, Kenneth** [GB/GB]; 49 Barrington Road, London  
N8 8QT (GB). **PULLEN, Keith** [GB/GB]; 134 Lynton  
Road, Acton, London W3 9HH (GB). **HASSARD, John**

Published:

— with international search report

[Continued on next page]

(54) Title: EXTRACTING POWER FROM A FLUID FLOW

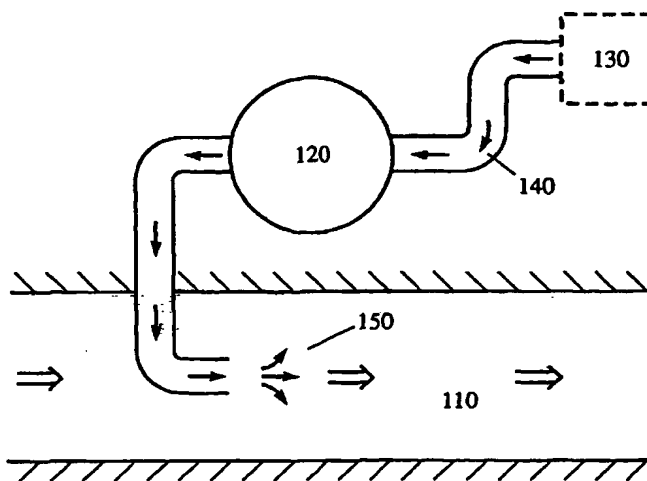

(57) Abstract: An apparatus for extracting power from a fluid flow (110) comprises a fluid driveable engine (120), a conduit (140), disposed to enable fluid communication between a portion of the fluid flow (110), the fluid driveable engine (120) and a transmission fluid, the fluid in the fluid flow and the transmission fluid being different fluids and the portion of the fluid flow being at a lower pressure than the transmission fluid by virtue of its flow rate, thus causing the transmission fluid to be drawn through the conduit to become entrained in the fluid flow, the fluid driveable engine being arranged such that the flow of the transmission fluid along the conduit acts to drive the fluid driveable engine (120).

WO 03/081030 A1